

# DHI-ARC3000H-GW2

Alarm hub



- Supports 150 wireless peripherals (6 sirens, 64 wireless keyfobs, 4 repeaters, 8 keypads, 8 PIR-Cameras).
- Peripherals status display (signal strength, battery level, temperature, program version).
- Wired, Wi-Fi or GPRS network connection.
- Dual SIM and Single Standby.
- Automatic network replenishment (ANR).
- Video linkage on App.
- Frequency hopping function and two-way communication technology ensure communication stability.
- Cloud update and automatic recovery from update failure.

## System Overview

An all new industrial design and advanced technological system, makes the new generation of wireless alarm products easier to install, look better, communicate more reliably and perform more stably. From the comfort of the mobile apps DMSS (for end users) and DoLynk Care (for installers), receive notifications in real-time, control and manage your devices, perform remote operations, and more.

## Scene

Mainly applied for villas, shops, apartments, etc.

## Technical Specification

### Audio and Video

Video Input	4-channel IPC
-------------	---------------

### Input/Output

Wireless Zone	Supports 150 wireless peripherals (6 sirens, 64 wireless keyfobs, 4 repeaters, 8 keypads, 8 PIR-Cameras)
---------------	--

### Port

Network Port	1 × RJ-45 10 M/100 M Ethernet port
Network Mode	Ethernet, Wi-Fi and Cellular network (Supports installation of dual SIM cards. Only one card can be enabled at a time)
Storage Battery	Built-in lithium battery
Indicator Light	1 for multiple statuses (alarm, arming, disarming, networking, and malfunction)
Button	1 × reset, 1 × power, 1 × AP
Buzzer	Built-in

### Function

Tamper Alarm	Yes
--------------	-----

SMS	Yes (up to 5 phone numbers)
Calling Alarm	Yes (up to 5 phone numbers)
Video Linkage	Yes
Network Protocol	TCP/IP, including PPTP, L2TP, DHCP, UPNP, and NTP
Remote Upgrade	Cloud update
Arm and Disarm	App; keyfob; schedule
Power Failure Protection for Configured Parameters	Yes
User Management	Share function for App users
Area	32 areas (rooms)
Cache	Max. 50 entries (ANR)
Low Battery Alarm	Yes
Search	Search for push messages, device status, and program version, and detect signal strength
Event Logs	Max. 5000

### Wireless

Carrier Frequency	433.1 MHz–434.6 MHz
Transmitter Power (EIRP)	Limit 10 mW
Communication Distance	Up to 1,200 m (3,937.01 ft) in an open space
Communication Mechanism	Two-way
Encryption Mode	AES128
Frequency Hopping	Yes

### Wi-Fi

Wi-Fi Standard	IEEE 802.11b/g/n
Wi-Fi Frequency Range	2400-2483.5 MHz

Wi-Fi Power Transmission  $\leq 20 \text{ dBm}$  @ 2400-2483.5 MHz

#### Cellular Network

Cellular Network Standard	GSM
Frequency Range	GSM: B1/B3/B8/B5 (1,900/1,800/900/850 MHz)
Transmitter Power (EIRP)	Power class0: 30 dBm $\pm 2 \text{ dB}$ (GSM 1,800/1,900) Power class5: 33 dBm $\pm 2 \text{ dB}$ (GSM 850/900)


#### General

Power Supply	12 V DC, 1.5 A (Europe, UK and USA power adapters are optional)
Operating Temperature	-10 °C to +50 °C (+14 °F to +122 °F) (indoor)
Operating Humidity	10%–90% (RH)
Product Dimensions	163.0 mm $\times$ 163.0 mm $\times$ 32.0 mm (6.42" $\times$ 6.42" $\times$ 1.26") (L $\times$ W $\times$ H)
Packaging Dimensions	219.0 mm $\times$ 187.0 mm $\times$ 91.0 mm (8.62" $\times$ 7.36" $\times$ 3.58") (L $\times$ W $\times$ H)
Installation	Wall mount; Desktop
Net Weight	0.38 kg (0.84 lb)
Gross Weight	0.8 kg (1.76 lb)
Certifications	CE; FCC
Casing	PC + ABS
Battery Life	Storage battery standby for 12 hours


#### Ordering Information

Type	Model	Description
Alarm hub	DHI-ARC3000H-GW2	Alarm hub (2G)

#### Installation

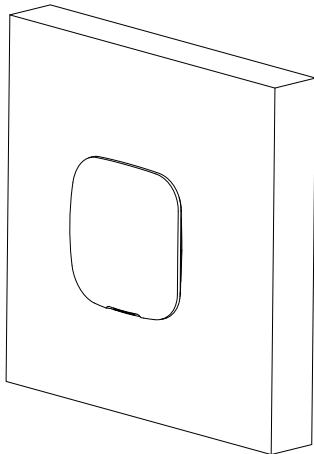

#### Dimensions (mm[inch])

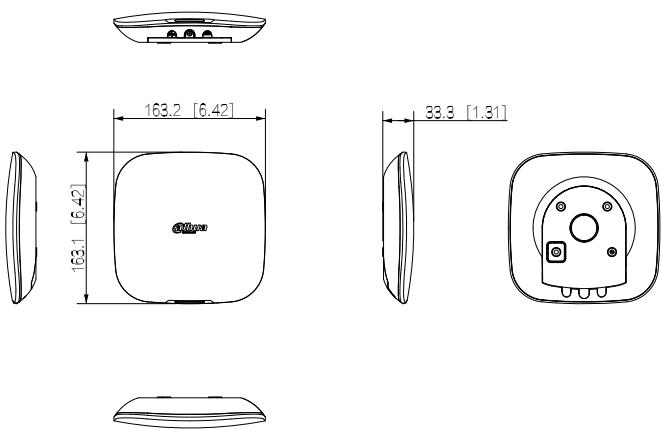

#### Application

