




Ground Solar Mounting

Advantage >>>

- EASY AND FAST INSTALLATION
- SUITABLE FOR ANY FLAT SURFACE($\leq 5^\circ$)
- WITHOUT PUNCH HOLES, DAMAGE THE BUILDING
- UNLIMITED EXPENSION
- SPACE SAVING PACKAGING


Parameter >>>

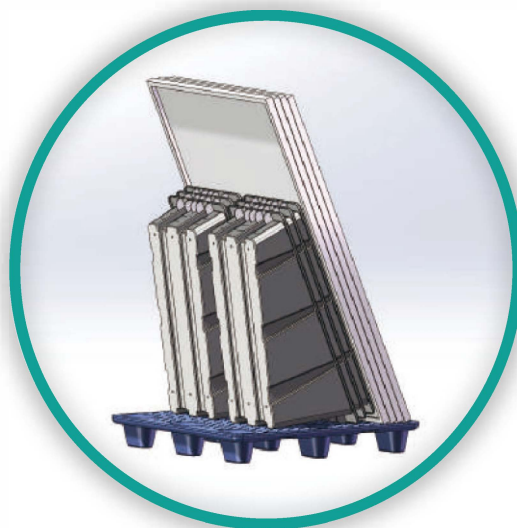

Model	Solarfam GPPM
Scope of delivery	Mounting tray+Extension rails+ Fixing material
Application area	Open spaces,green areas (excluding hydrogen sulphide exposure)
Ambient temperature range	- 40°C~+60°C
Material of mounting tray	Aging resistance, UV Resistant Polypropylene
Applicable width range for solar module	980mm-1140mm
Module tilt	15°
System orientation	East-West, south
Weight approx.	≈ 4.5kg
Dimensions	1150*525*458mm
Pieces per Container	660pcs/20GP,size of each pallet: 1200*1050*2250mm 1640pcs/40FT,size of each pallet: 1200*1050*2550mm
Warranty	10years
Number of installataion	N+1,1 more than number of solar panels
Certifications	CE,RoHs



Ground Solar Mounting

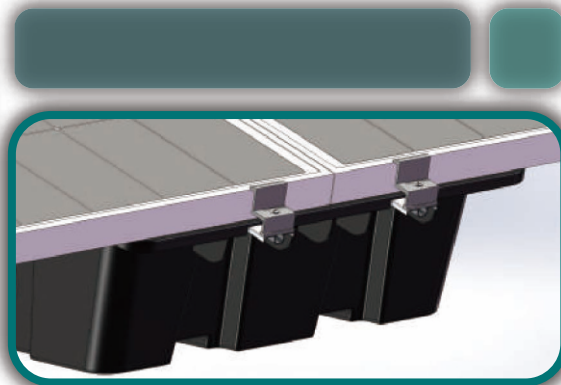

Common Configuration >>>

The Width of solar panels	The thickness of solar panels	List
1038mm $\pm$ 3mm	30mm	GA-R80-E30-C30-C25
	35mm	GA-R80-E35-C33-C25
	40mm	GA-R80-E40-C33-C25
1095mm $\pm$ 3mm	30mm	GA-R108-E35-C28-C25
	35mm	GA-R108-E40-C28-C25
	40mm	GA-R108-E45-C28-C25
1134mm $\pm$ 3mm	30mm	GA-R108-E35-C28-C25
	35mm	GA-R108-E40-C28-C25
	40mm	GA-R108-E45-C28-C25

Notes:GA-R80-E30-C30-C25

