

Ulica Solar is a subsidiary of Shanshan Co.,Ltd(SH.600884), Top 500 Enterprise in China. Ulica designs and manufactures high-quality solar cells and panels starting from August 2005. Its product line covers both mono and poly crystalline models, suitable for full range of projects from off-grid to on-grid, from residential to commercial.

POLY 60CELL 5BB



5 Bus bar cell design

More evenly distributed mechanical stress
Less micro cracks and resistance losses
Higher fill factor and higher performance



Positive power tolerance (0~+5W)



Outstanding mechanical load resistance

3800 Pa wind load, 5400 Pa snow load



High performance under low light

Works at cloudy, rainy days



Anti-PID(potential induced degradation)

Passed anti-PID test under 85% damp heat,
85% relative humidity for 96 hours



Great Durability against extreme conditions

Passed salt mist corrosion test, ammonia corrosion test,
dust & sand test, fire test, all certified by TÜV





Double electroluminescence (EL) tests

Carefully inspected before and after lamination
to guarantee fault-free modules



World famous insurance

CHUBB(USA), Solar Insurance&Finance(Netherlands)

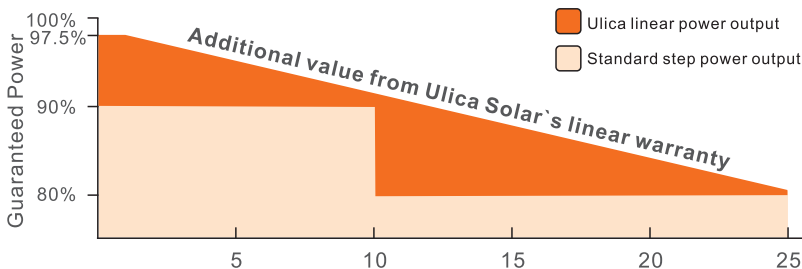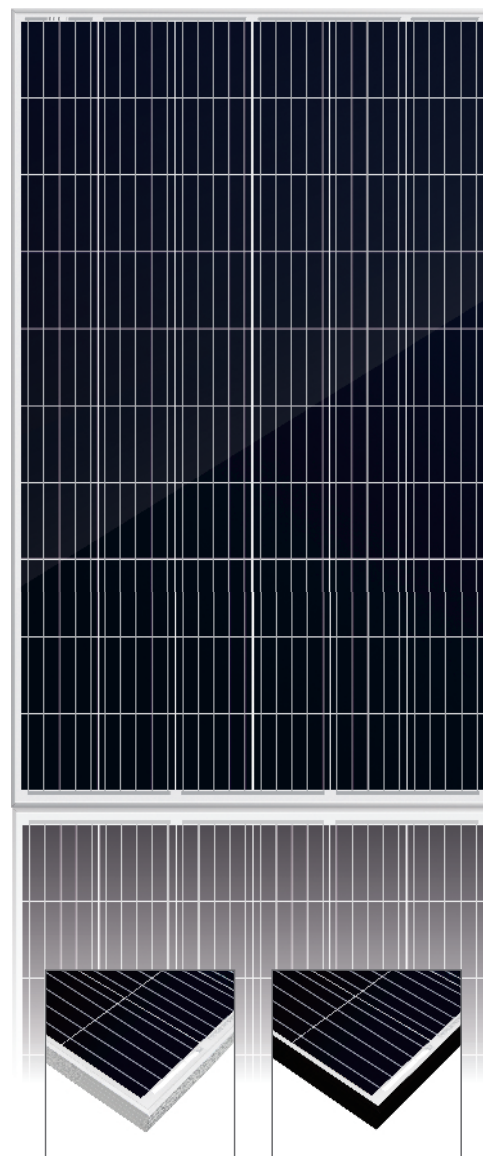

12-year product warranty

25-year linear power warranty



ELECTRICAL PERFORMANCE

Electrical Parameters Standard Test Conditions

Module Type			UL-270P-60	UL-275P-60	UL-280P-60	UL-285P-60
Power Output	Pmax	W	270	275	280	285
Power Tolerance	Δ Pmax	W	0/+5W			
Module Efficiency	η m	%	16.50	16.80	17.11	17.41
Voltage at Pmax	Vm	V	31.0	31.1	31.3	31.5
Current at Pmax	Im	A	8.71	8.85	8.95	9.05
Open-Circuit Voltage	Voc	V	38.2	38.3	38.5	38.7
Short-Circuit Current	Isc	A	9.13	9.25	9.35	9.45

STC: 1000w/m² irradiance, 25°C module temperature, AM1.5 spectrum.

/// THERMAL CHARACTERISTICS

Nominal Operating Cell Temperature	NOCT	°C	45±2
Temperature Coefficient of Pmax	γ	%/°C	-0.403
Temperature Coefficient of Voc	βvoc	%/°C	-0.330
Temperature Coefficient of Isc	αisc	%/°C	+0.049

OPERATING CONDITIONS

Max.System Voltage	1000V/1500V
Max.Series Fuse Rating	15A
Operating Temperature Range	-40℃～85℃
Max static snow load	5400Pa
Max static wind load	3800Pa
Application Class	A

CONSTRUCTION MATERIALS

Front Cover(material/type/thickness)	low-iron tempered glass/3.2mm
Cell(quantity/material/type/dimension)	60/polycrystalline/156.75x156.75mm
Encapsulant(material)	ethylene vinyl acetate(EVA)
Frame(material/anodization color)	anodized aluminum alloy/silver or black
Junction Box(protection degree)	IP67
Cable(length/cross-sectional area)	900mm/4mm ²
Plug Connector	MC4 compatible

GENERAL CHARACTERISTICS

Dimension(L/W/H)	1650/992/35mm
Weight	18kg

PACKING CONFIGURATION


Pallet Size(L/W/H)	1690/1120/2440mm
Pallet Weight	1260kg
Pieces per Pallet	64pcs
Pieces per Container	896pcs

INTERNATIONAL CERTIFICATES



- TÜV SÜD, TÜV NORD, UL, CE, JET, CEC, MCS, CQC, INMETRO, NRE, KS
- ISO9001:2015
- ISO14001:2015
- BS OHSAS 18001:2007

I-V CURVE

I-V characteristics at different irradiations

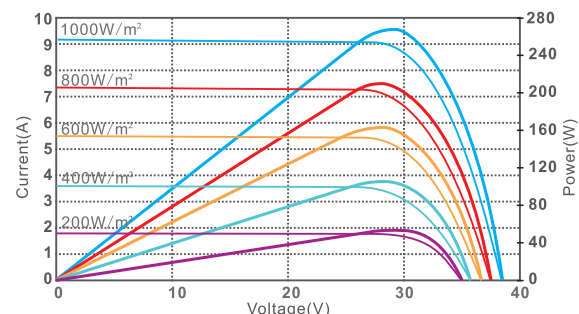

I-V characteristics at different temperature

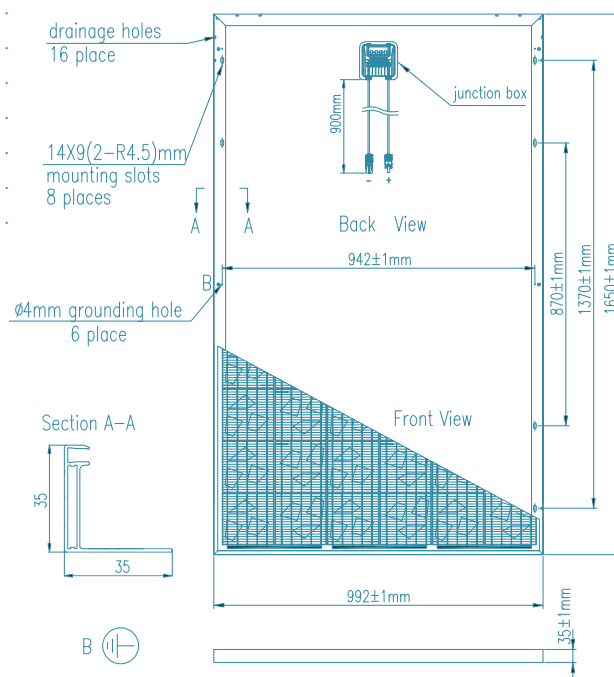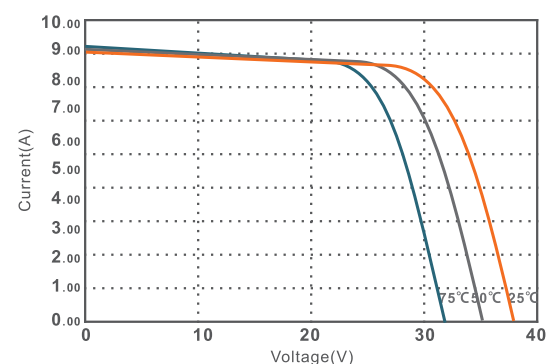

Please read the instruction entirely before handling, installing and operating Ulica Solar modules.

Due to continuous research and development, the specification is subject to change without prior notice.